

CONNECTOR **KJ5108** (R-108)

CE

SALA Detachable, Steel "Scaffold hook" connector for use with fall arrest equipment.

Description

Sala connectors ensure there are no weak links in the worlds premier safety systems.

This "Scaffold hook" can be attached to spliced or webbing lanyards, and other PPE products. It is supplied with a fixing pin, which allows it to be semi permanently attached to equipment. This stops it from accidentally becoming detached or lost, and insures correct loading.

Its opening of 50mm makes it ideal for ladder climbing, scaffolding or larger anchorage points.

Main features

- Alloy steel construction
- Large opening 50mm ideal larger anchorages, and suitable for scaffold tubes.
- ¼ turn twist lock gate, automatic closing and locking
- Double action security
- Quick and easy to open with one hand, easily used by left and right handed persons
- Semi permanent attachment eye
- Marked with Batch reference for easier quality assurance traceability.

Applications

Specially adapted to easily make connections to anchorage points up to 50mm in diameter.

Ideally suited for work in the following areas:-

- Scaffolding/steel work
- Mast tower work
- Structural steel
- Ladder climbing

capital

Capital Safety Group www.capitalsafety.com France Tel +33 (0)4 97 10 00 10 Email information@capitalsafety.com UK Tel +44 (0)1928 571 324 Email info@csgne.co.uk



Associated Products

Can be used in association with:-

KE5175R Splices rope lanyard KE5125W, KE5175W Webbing lanyard KE5125X, KE5175X Expander lanyard

KA1RDS30, KA1RDS60, KA1RDS90

Rapid Deployment System (RDS) 30m, 60m and 90m versions.




KJ5108 (R-108)



SALA Detachable, Steel "Scaffold hook" connector for use with fall arrest equipment.

Technical specification

- Material -Heat treated, high tensile alloy steel
- Surface finish Zinc plated with yellow passivation
- Gate opening 50mm
- Available space under captive pin diameter 24mm
- Height 219mm
- Width 129mm
- Net Weight 682g
- CE marked Yes
- Conforms to standard EN362
- Breaking Strength 30kN
- Marking Quality control batch reference
- Marked breaking Strength

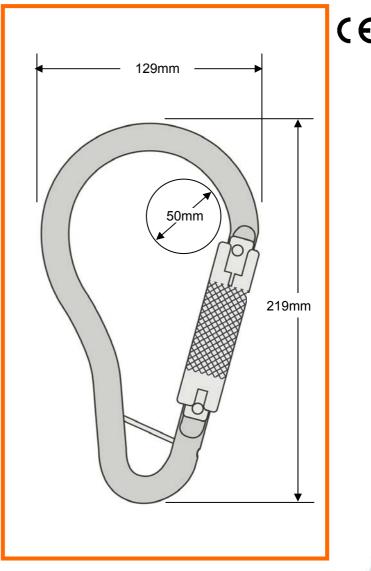

Options

KJ50645

Lightweight, detachable, double action aluminium scaffold hook with 60mm opening.

KJ527

Lightweight, Fixed, aluminium, double action scaffold hook with 60mm opening.

capital

Capital Safety Group www.capitalsafety.com France Tel +33 (0)4 97 10 00 10 Email information@capitalsafety.com UK Tel +44 (0)1928 571 324 Email info@csgne.co.uk



A – 09/04